


# NB/XB Series Battery

## Hot Swappable Battery

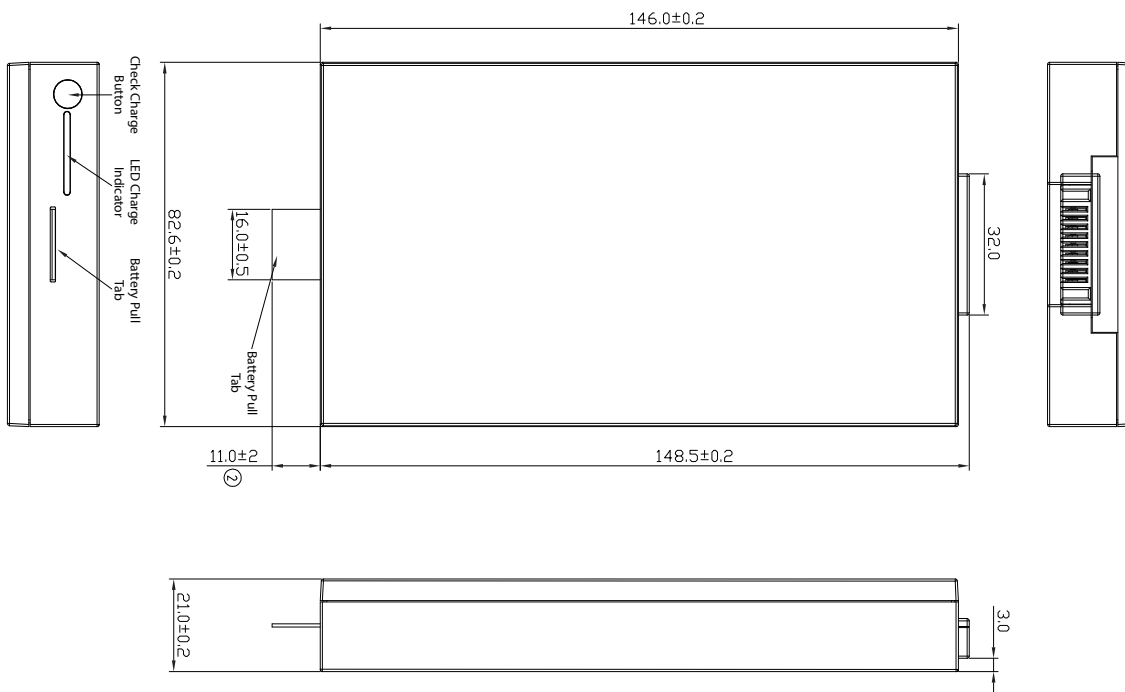

## Technical Specifications

<b>Rated Capacity</b>	6000mAh
<b>Nominal Voltage</b>	14.8V
<b>Charge Voltage</b>	17.4V
<b>Operating Temperature</b>	0-40°C
<b>Storage Specifications</b>	-10°C to +35°C @ 80% humidity, non-condensing up to 3 months before recharging. Cybernet recommends recharging the battery every 3 months in storage, not to exceed 6 months before recharging
<b>Cycle Life</b>	300 cycles to ≥80% of original full capacity (1 cycle = 1 full charge and 1 full discharge)
<b>Wh Rating</b>	88.8Wh
<b>Weight</b>	~1lb
<b>Dimensions</b>	146.0mm x 82.6mm x 21.0mm (L x W x H)
<b>Over-charge Protection</b>	Yes
<b>Over-current Protection</b>	Yes
<b>Over-discharge Protection</b>	Yes
<b>Over-Temperature Protection</b>	Yes
<b>Multi-LED Charge Indicator</b>	Yes, 1 LED = 20%, 2 LED = 40%, 3 LED = 60%, 4 LED = 80%, 5 LED = 100%
<b>Warranty</b>	1 Year Standard
<b>Maintenance Schedule</b>	Cybernet strongly recommends replacing every 2 years